

INSTALLATION GUIDELINES

Regupol® 4515 Eco is a general purpose acoustic underlayment manufactured from a combination of cork granules and rubber crumb.

Before you lay Regupol® 4515 Eco

1. Prepare the concrete floor. It is important that the concrete floor is dry, clean (free of dirt and concrete dust) and flat (no more than 2mm undulations). If the floor is uneven, it must be made level.
2. Please ensure each roll of **Regupol® 4515 Eco** is completely unrolled, turned over and left in the area to which it is to be applied for a minimum of 6 hours or ideally overnight prior to cutting and installing.

Laying the Regupol® 4515 Eco


1. Bond **Regupol® 4515 Eco** to the base floor making sure the print, "REGUPOL® – DO NOT REMOVE" is shown at all times. The **Regupol® 4515 Eco** should be bonded to the subfloor using one of our recommended adhesives – please contact CMS Danskin for a list or alternatively please refer to the website www.cmsdanskin.co.uk. Please ensure the adhesive guidelines are followed at all times.
2. Lay the **Regupol® 4515 Eco** into the adhesive and press from the centre outwards to exclude air and ensure overall contact with the adhesive.
3. Roll the **Regupol® 4515 Eco** with a 68kg flooring roller, from end to end and side to side to ensure overall contact.
4. Please leave a minimum gap of 3mm around the entire perimeter to allow for potential expansion and contraction. Do not butt the **Regupol® 4515 Eco** against the skirting boards.
5. Use a craft knife and straight edge for cutting to size and please ensure that all edges are butt jointed.
6. After 30 minutes, when the floor has been completely covered, roll once again to ensure contact is maintained.
7. Please do not apply loads or move furniture on the **Regupol® 4515 Eco** until the adhesive has fully set. Please refer to the adhesive manufacturer's installation guidelines for curing times.

Installation Service

In addition to supply of this product, CMS Danskin Acoustics offers a competitively-priced installation service anywhere in the UK. Use of our service ensures that installation is performed to the highest standards by tradesmen fully experienced in the specialist skills of fitting acoustic materials correctly. For further details contact our technical team on 01925 577711.



To access the CMS Danskin website for further product information please scan the QR code

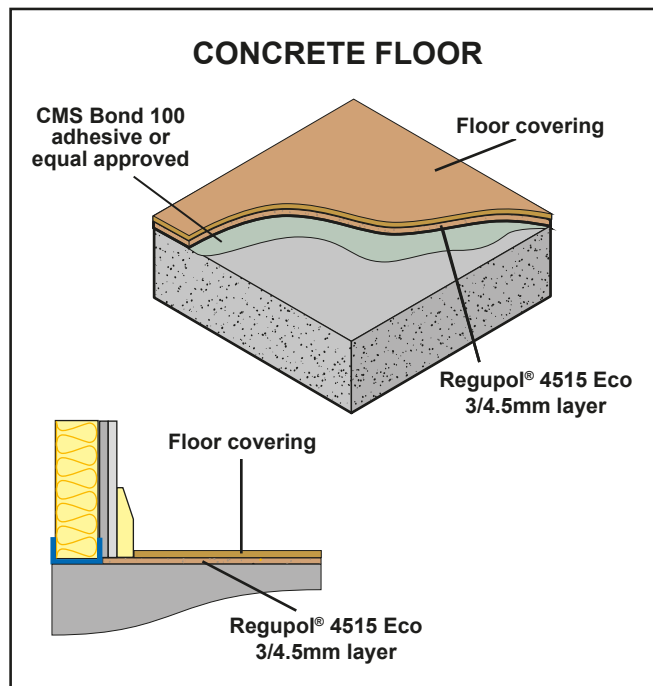

Diagrams are for example purposes only

NB

The recognised technical rules of the industry, and the code of practice requirements of BS8203:2001 "Installation of Resilient Floor Coverings" are to be observed.

Regupol® Acoustic Underlayments can be easily installed provided BS8203:2001 and our installation guidelines are observed.

Storage

Regupol® 4515 Eco must be stored indoors. At no time must the **Regupol® 4515 Eco** be exposed to the elements of the weather.

Regupol® 4515 Eco must always be kept dry, otherwise moisture will build up in the material and will subsequently make bonding to the subfloor very difficult. Moisture will also cause the material to curl and ripple at the edges once unrolled.

It is recommended that the polythene packaging be removed in the area where it shall be applied.

Important Notes

1. **Regupol® 4515 Eco** is manufactured from a combination of cork granules and rubber crumb. The manufacturing process of this product results in the presence of carbon black fillers, which can cause plasticiser migration; the discolouration of light coloured floor finishes such as vinyls and carpets. To avoid such potential problems, we strongly recommend that CMS Bond 100 be used in all instances.
2. **Not to be installed on timber based floor constructions.**
3. Health and safety data sheets are available on request.

Regupol® and Regufoam® are registered trade marks of BSW GmbH

Scotland Office:

1 Netherton Road, Wishaw ML2 0EQ

Central/Southern Office:

Unit 2 Lyncastle Road, Warrington, Cheshire WA4 4SN

email: info@cmsdanskin.co.uk website: www.cmsdanskin.co.uk

t: 01698 356000 f: 01698 372222

t: 01925 577711 f: 01925 577733